


Druckfolgeventil VSQ-CC-LM (230958) Valve de séquence VSQ-CC-LM

Druckfolgeventil mit Druckkompensation für Leitungseinbau
Valve de séquence avec compensation de la pression pour installation de ligne

RE 18316-65/10.09

VSQ-CC-LM (G1/2)

05.21.17.00-Y-Z

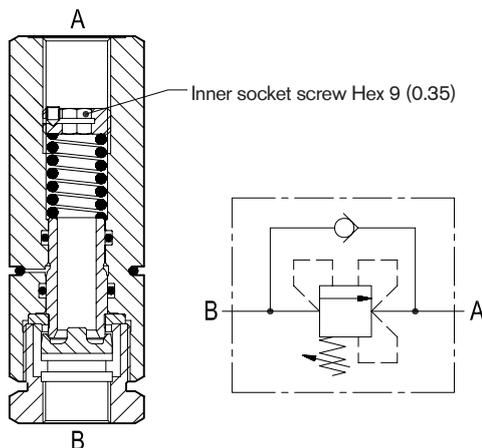


Description

They are composed by a pressure compensated relief valve (opening "B-A"), and by an annular check valve "A-B". Initially the flow goes to a first line connected in parallel to the B side, not shown here, and pressure increases until reaching the selected relief setting; then the relief valve opens and the second circuit is supplied out of A port, while the actuator connected to the B side remains pressurized.

The valve applies a balanced relief piston allowing relief operation at the valve setting independent of back-pressure at A (back-pressure is not additive). With line pressure equal or higher than setting, after valve opening, the full pressure is transferred from B to A.

The incorporated check valve allows the reverse motion of the actuators which happens without specific control of the sequence, only depending from the load/pressure conditions.

Performance

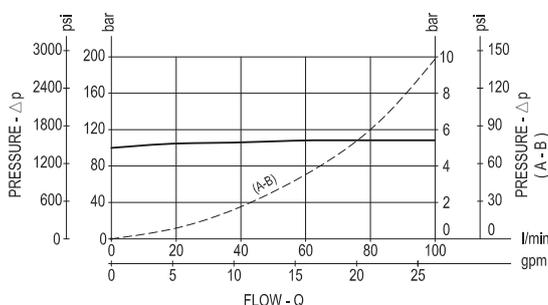

Advantages


- The pressure compensation allows to transfer the full system pressure to the second actuator.
- Very compact design and inline mounting for space saving.
- Mounting position is unrestricted.
- Low Δp for B-A flow.

Technical data

Port A-B	Pressure P max bar (psi)	Flow Q max l/min (gpm)	Weight kg (lbs)
G 1/2	350 (5000)	100 (27)	0.38 (0.84)

For a good performance, the pressure in the secondary circuit should not drop below 20 bar (290 psi).

Dimensions

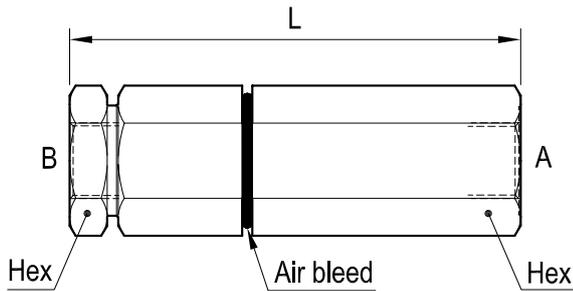

Ports size / Dimensions

Y	Port A-B	L mm (inches)	Hex mm (inches)
03	G 1/2	120.5 (4.74)	36 (1.42)

Springs				
Z	Adj. press. range bar (psi)	Pres. increase bar/turn (psi/turn)	Std. setting bar (psi) Q=5 l/min	Ordering code
10	50-140 (725-2000)	20 (290)	100 (1450)	03.51.01.251

The relief setting is adjustable by turning the internal ring nut (hexagon 9 mm): to turn the nut loosen first the little locking screw, then tighten it again after the adjustment. For the spring selection, refer to the table.

Applications

They are employed to control the sequence of two or more cylinders or motors, when the second actuator requires less pressure to move, but the pressure needed is not negligible. The pressure at A needed to operate the second actuator is not additive to the relief setting and this results also in energy saving. The incorporated check valve allows free reverse motion without specific control of the sequence.

Ordering code

05.21.17.00	Y	Z
-------------	---	---

Direct acting poppet type pressure compensated

Springs see table "Z"

Ports size / Dimensions see table "Y"

Type	Material number	Type	Material number	Type	Material number
052117000310000	R930001451				